


Manual Total Station

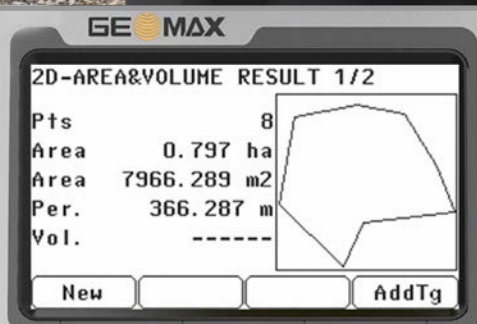

Advanced Software

- Advanced application package
- Intuitive user interface
- Graphical guidance

neXus EDM

- 500 m non-prism range
- High Precision
- High Reliability

Advanced black & white display

- Largest display in class
- Highest resolution in class
- Ergonomic design



Zoom25 Series

If you don't want to compromise on quality: The GeoMax Zoom25 series is your choice suitable for all standard surveying tasks.



Zoom25 neXus	Distance measurement on prism
Zoom25 neXus5	Distance measurement on reflector and 500m non-prism*

ANGLE MEASUREMENTS

Accuracy	1" (0.3 mgon), 2" (0.6 mgon), 5" (1.5 mgon)
Display resolution	0.1" / 0.1 mgon
Method	Absolute, continuous, diametrical
Compensation	Quadruple axis

DISTANCE MEASUREMENTS

Prism	3,500 m / 2 mm + 2 ppm
Non-prism	500 m / 2 mm + 2 ppm
Footprint	8 x 20 mm**

PHYSICAL SPECIFICATIONS

Weight	5.1 kg (incl. battery & tribrach)
Operating temp.	-30°C to 50°C***
Protection class	IP55 dust and waterproof
Humidity	95 %, non-condensing

* Optimal conditions to Kodak Grey Card (90% reflectivity)
 ** At 50 m distance
 *** Optional tested polar version, standard -20°C to 50°C
 **** Battery time may be shorter depending on conditions.
 All trademarks and trade names are those of their respective owners.

Distance meter (Prism Mode): Laser class 1 in accordance with IEC 60825-1 resp. EN 60825-1; **Laser plummet:** Laser class 2 in accordance with IEC 60825-1 resp. EN 60825-1.

Distance meter (Non-Prism Mode neXus): Laser class 3R in accordance with IEC 60825-1 resp. EN 60825-1



12/17 867504 enus



Copyright GeoMax AG.

Illustrations, descriptions and technical specifications are not binding and may change.

With its lightweight design the Zoom25 manual total station will help you get the job done.

A fast, simple and flexible data transfer is ensured by the incorporated RS232, USB and Bluetooth® technology.

With its included powerful application package, intuitive operation, on a large, high resolution display, combined with an extra-long battery life, the Zoom25 makes you more productive than ever before.

INTERFACE

Keyboard	Full alphanumeric, dual face (opt.)
Display	High resolution (280x160 pixel), 8 lines x 30 characters, illuminated
Data recording	Internal memory; 50,000 pts
Interface	USB, serial & external power
Removable memory	USB memory stick
Bluetooth	Device Class 1

POWER SUPPLY

Internal battery	Removable Li-Ion
Operating time****	36 h (continuous angle), 16 h (continuous distance measurement every 30s)

PLUMMET

Type	Laser point, adjustable brightness
Accuracy	1.5 mm at 1.5 m instrument height

OPERATING SYSTEM

Microsoft®	Windows embedded CE
------------	---------------------



Learn more at:
geomax-positioning.us

SOLD & SERVICED BY

Survey Instrument Sales

Helping You Measure the World

24037 Acacia Redford, MI 48239 • 313-535-5252

www.SurveyInstrumentSales.com